
Jindao[®]




BARE TYPE CEMENTITIOUS INFILL STEEL OA FLOOR PANEL 500 x 500 mm

- Designed specifically for office building
- Excellent rolling load performance
- Superior ultimate load performance
- Interchangeable panel strengths
- Electrodeposition cathodic epoxy paint finish for life time protection
- Light weight cementitious fill makes panels solid and quiet
- Completely non-combustible
- Excellent grounding and electrical continuity
- Class A flame spread and smoke development rating
- All-steel pedestals provide excellent impact load performance

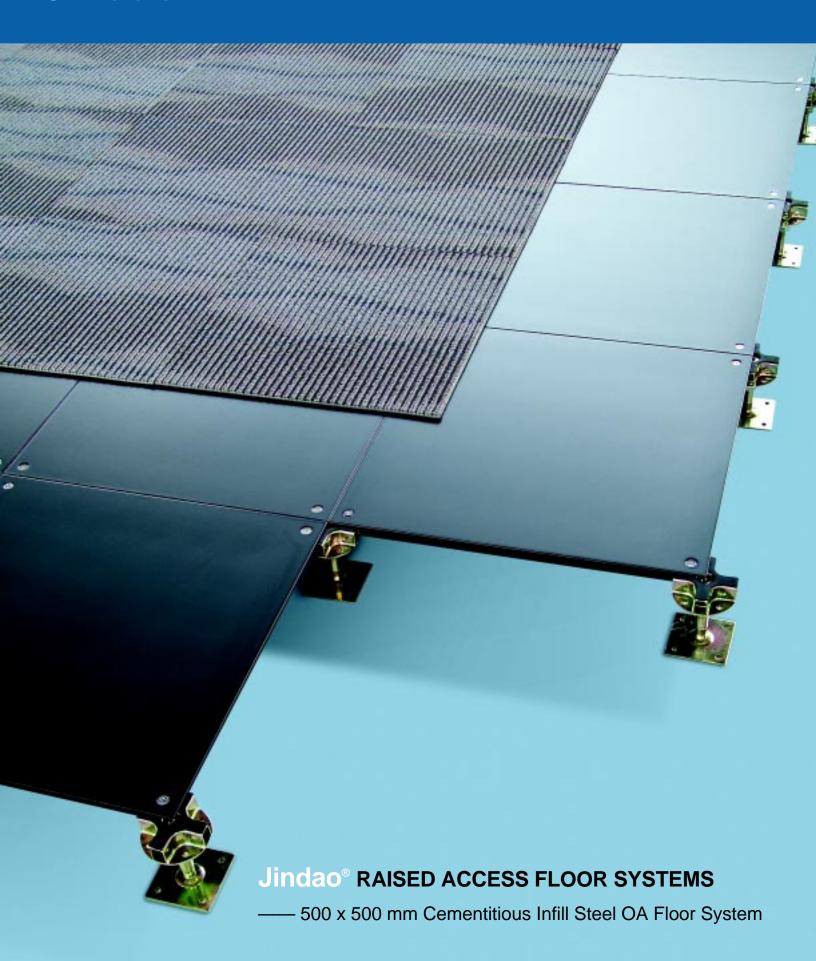

SOLID OA FLOOR PANEL (500 x 500 mm)

- Designed for traditional office building
- Engineered positive engagement between panel and pedestal
- Easy and quick accessibility
- User friendly
- Excellent seismic proof performance

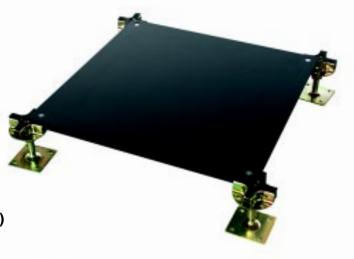


CUTOUT OA FLOOR PANEL (500 x 500 mm)

- Designed for traditional office building
- Engineered positive engagement between panel and pedestal
- Easy and quick accessibility
- User friendly
- Excellent seismic proof performance





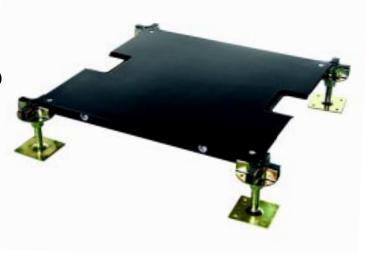

Specification

Product Name	Loading Performance				
	Concentrated Load mm/N (kgf)	Ultimate Load N (kgf)	Weight	Standard FFH	Covering
OA800	2/3000(300)	>8000(800)	36.0 kg/m²	70mm ~200mm	Carpet Tile
OA1000	2/5000(500)	>10000(1000)	39.6 kg/m²		


Catalog No.

Loading	Solid Panel Without Cutout	Dual Cutout Panel	
300kgf	OA800A	OA800C	
500kgf	OA1000A	OA1000C	

Jindao®

COMPANY PROFILE

- 1. Company Name: Jindao Floors, Inc.
- 2. Area:
 - Land: 60,000 m²
 - 2 factories for manufacturing woodcore panel & steel panel
- 3. Daily Manufacturing Capability:
 - 2,000 m² panels
 - 10,000 pieces of pedestals



LOCATION MAP: We are located in Shandong Province, China, 100 miles away from famous Qingdao Port,

Jindao Floors, Inc.

ADDRESS: Xiyou Town, Laizhou City, Shandong

Province, China 261418 TEL: (86-535) 274 3446 FAX: (86-535) 274 3449

URL: http://www.jindaofloors.com/ EMAIL: info@jindaofloors.com